

20FT SHIPPING CONTAINERS / OPEN TOP SHIPPING CONTAINERS

20FT High Cube Hard Open Top Container - Steel Floor

LEN-P-000669



A 5/7 mm welded checker plate steel floor defines this unit. The surface is liquid-tight, takes direct load pressure and contains fluid spills, and it can be welded and anchored to without added reinforcement. Above it sits a removable steel roof and high cube vertical clearance.

EXTERNAL DIMENSIONS (L×W×H)

6.058 m × 2.438 m × 2.896 m

INTERNAL DIMENSIONS (L×W×H)

5.898 m × 2.332 m × 2.677 m

DOOR OPENING (W×H)

2.338 m × 2.567 m

PRODUCT PHOTOS. TECHNICAL DATA. PRACTICAL SELECTION GUIDANCE.



TECHNICAL PROFILE

20FT High Cube Hard Open Top Container – Steel Floor

Published product information. Check the final configuration, supplied equipment and unit-specific documents against the confirmed order.


DETAIL	PUBLISHED SPECIFICATION
Product reference	LEN-P-000669
Product category	20ft Shipping Containers / Open Top Shipping Containers
External dimensions (L×W×H)	6.058 m × 2.438 m × 2.896 m
Internal dimensions (L×W×H)	5.898 m × 2.332 m × 2.677 m
Door opening (W×H)	2.338 m × 2.567 m
Roof opening (L×W)	5.570 m × 2.210 m
Internal volume	36.80 m ³
Tare weight	3,220 kg
Max payload capacity	27,260 kg
Gross weight rating	30,480 kg
Container type	20FT High Cube Hard Open Top

TECHNICAL PROFILE / CONTINUED

20FT High Cube Hard Open Top Container – Steel Floor

DETAIL	PUBLISHED SPECIFICATION
Material	CORTEN anti-corrosive steel
Flooring	5/7 mm welded checker plate steel
Roof	steel removable roof with full access
Header beam	detachable for tall cargo clearance
Ventilation	standard passive air vents
Security	integrated lockbox for padlock use
Finish	RAL 3002, custom colors by request
Stackable	yes, intermodal compliant
Removable steel roof.	Opens the top face to crane access for cargo loaded from above or equipment lifted in vertically.
Welded steel checker plate floor.	5/7 mm thick and liquid-tight, capable of withstanding direct load pressure and containing fluid spills.
High cube design.	Additional vertical clearance for machinery, pallets or built-in modifications that will not fit a standard-height unit.
Detachable door header beam.	Expands rear entry space for tall or irregularly shaped items.

A CLOSER LOOK

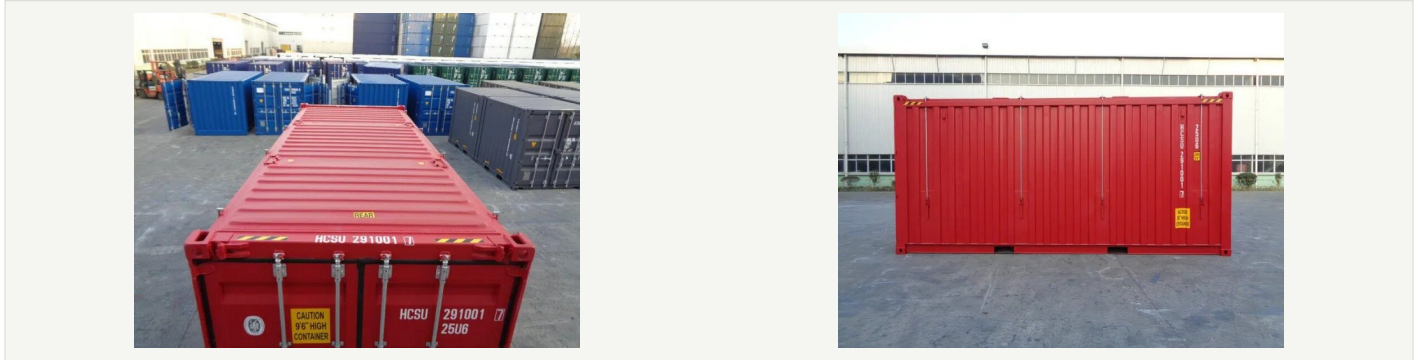

APPLICATION & FIT

Storage, freight handling or the stated container application

Selection checks: Check cargo dimensions against internal size and door opening.; Prepare level supports and adequate delivery and handling space.; Review the stated condition, floor, doors and any specialist equipment..

Does the nominal container length describe usable space?

Nominal length identifies the container format. Internal dimensions and door opening are the relevant checks for cargo fit; use the listed values or request the unit drawing.

Can the unit be used for international freight?

Storage suitability and shipping acceptance are different checks. Where freight service is required, verify the unit identification, condition and applicable inspection documentation.

How are delivery and after-sales terms confirmed?

Delivery charges, availability, return conditions and warranty coverage follow the current company policies and the confirmed order. Use the product reference when contacting the sales desk.

PLAN YOUR ORDER WITH LENOVA GROUP

Quote reference LEN-P-000669. Tell us the application, required configuration and delivery ZIP code.

[View the current product page](#) | [Contact the sales desk](#)

Reference: [Current product information](#). Reviewed 21 October 2026. This brochure is a product guide; the final order specification and current company policies define the supplied scope.