

20FT SHIPPING CONTAINERS / OPEN SIDE SHIPPING CONTAINERS

20FT All Side Open Container (8'6")

LEN-P-000683



This 20FT unit carries hinged door panels on all four faces: rear, both sides and front. Cargo can be entered, staged and drawn off from whichever face the yard layout allows, which shortens turnaround time and tightens staging precision across a workflow.

CONTAINER TYPE

20FT All Side Open, 8'6" height

EXTERNAL DIMENSIONS (L x W x H)

20' x 8' x 8'6"

INTERNAL DIMENSIONS (L x W x H)

19'4" x 7'8" x 7'10"

PRODUCT PHOTOS. TECHNICAL DATA. PRACTICAL SELECTION GUIDANCE.



TECHNICAL PROFILE

20FT All Side Open Container (8'6")

Published product information. Check the final configuration, supplied equipment and unit-specific documents against the confirmed order.

DETAIL	PUBLISHED SPECIFICATION
Product reference	LEN-P-000683
Product category	20ft Shipping Containers / Open Side Shipping Containers
Container type	20FT All Side Open, 8'6" height
External dimensions (L × W × H)	20' × 8' × 8'6"
Internal dimensions (L × W × H)	19'4" × 7'8" × 7'10"
Side door openings (each)	approx. 7'8" W × 7'5" H per panel
Tare weight	~5,350 lbs
Max gross weight	67,200 lbs
Payload capacity	~61,850 lbs
Material	CORTEN steel exterior
Flooring	marine-treated 28mm plywood




TECHNICAL PROFILE / CONTINUED

20FT All Side Open Container (8'6")

DETAIL	PUBLISHED SPECIFICATION
Locking system	double high locking bars with lockbox
Color	RAL5013, custom finishes available
Optional coatings	anti-graffiti, logo repainting, or full respray
Four-sided door access.	Doors hinge on every side, so entry, exit and load sequencing all run faster and staging precision improves across workflows.
Industrial marine plywood flooring.	Floor panels are 28mm marine-grade hardwood, resisting warp under heavy static or rolling loads.
Double high locking gear.	Reinforced locking bars give smoother door operation and added mechanical torque.
Forklift pockets.	Base channels are integrated for lateral movement and secure yard placement by forklift or container handler.
Integrated lockbox.	A welded lockbox is installed on the cargo doors for added padlock security.
Weather vents.	Vents are built in to circulate air internally and hold down moisture coming off stored materials.
ISO compliant	standard corner castings, chassis-fit base, intermodal-ready.
Forklift compatible	lateral movement supported by built-in forklift tunnels.
Ventilated design	safe for use with moisture-sensitive or mixed cargo types.

A CLOSER LOOK

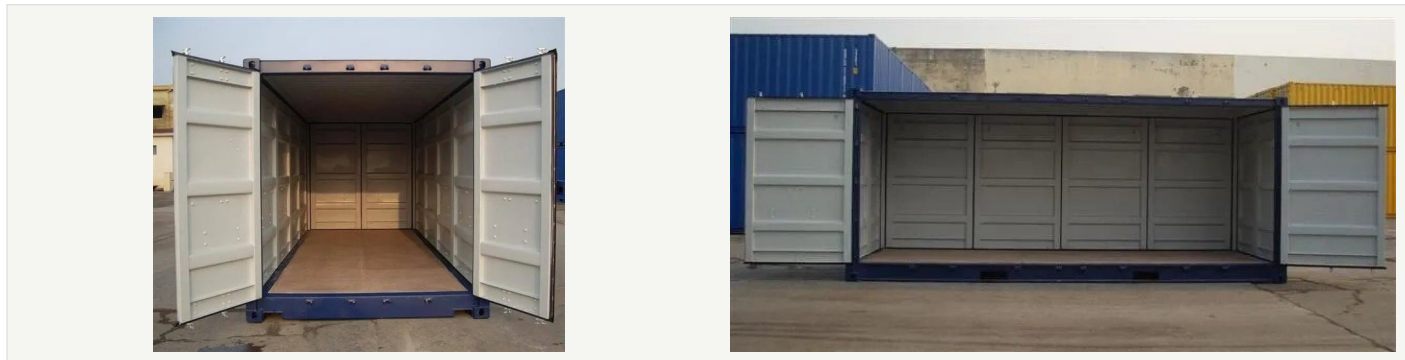

APPLICATION & FIT

Storage, freight handling or the stated container application

Selection checks: Check cargo dimensions against internal size and door opening.; Prepare level supports and adequate delivery and handling space.; Review the stated condition, floor, doors and any specialist equipment..

Does the nominal container length describe usable space?

Nominal length identifies the container format. Internal dimensions and door opening are the relevant checks for cargo fit; use the listed values or request the unit drawing.

Can the unit be used for international freight?

Storage suitability and shipping acceptance are different checks. Where freight service is required, verify the unit identification, condition and applicable inspection documentation.

How are delivery and after-sales terms confirmed?

Delivery charges, availability, return conditions and warranty coverage follow the current company policies and the confirmed order. Use the product reference when contacting the sales desk.

PLAN YOUR ORDER WITH LENOVA GROUP

Quote reference LEN-P-000683. Tell us the application, required configuration and delivery ZIP code.

[View the current product page](#) | [Contact the sales desk](#)

Reference: [Current product information](#). Reviewed 21 October 2026. This brochure is a product guide; the final order specification and current company policies define the supplied scope.