

20FT SHIPPING CONTAINERS / NEW SHIPPING CONTAINERS

20FT New Tri-Door Shipping Container

LEN-P-000687



Doors at both ends, and a lockbox on each of them. The tri-door layout gives three secure cargo access points: standard rear double doors, a front-end single cargo door, and a complete locking system with welded steel lockboxes. Loads can be separated and retrieved without unloading the whole box.

FRONT DOOR

Single swing door - 46" width with extended handle for stand-alone front loading

LOCKING SYSTEM

Welded lockboxes on both access points - padlock compatible, anti-pry reinforcement

CONTAINER TYPE

20FT Tri-Door - New (One Trip)

PRODUCT PHOTOS. TECHNICAL DATA. PRACTICAL SELECTION GUIDANCE.



TECHNICAL PROFILE

20FT New Tri-Door Shipping Container

Published product information. Check the final configuration, supplied equipment and unit-specific documents against the confirmed order.

DETAIL	PUBLISHED SPECIFICATION
Product reference	LEN-P-000687
Product category	20ft Shipping Containers / New Shipping Containers
Rear doors	Standard double swing doors - 36" locking bar handles, full-width cargo opening (78" W x 75" H)
Front door	Single swing door - 46" width with extended handle for stand-alone front loading
Locking system	Welded lockboxes on both access points - padlock compatible, anti-pry reinforcement
Container type	20FT Tri-Door - New (One Trip)
Steel	CORTEN, heavy-duty and anti-corrosive
Corner castings	ISO standard - stackable and crane-lift ready
Deck	28mm thick marine-grade plywood (19-ply)
Forklift pockets	Integrated at base for repositioning
Airflow	8 weatherproof passive vents (4 per side)
Security	Lockboxes welded to each cargo door for tamper resistance
Roof access	Welded steel ladder affixed to front wall




TECHNICAL PROFILE / CONTINUED

20FT New Tri-Door Shipping Container

DETAIL	PUBLISHED SPECIFICATION
External dimensions	20' L × 8' W × 8'6" H
Internal dimensions	19'6" L × 7'8" W × 7'10" H
Door opening (rear)	7'8" W × 7'5" H
Door opening (front)	46" W
Tare weight	5,070 lbs
Max payload capacity	62,130 lbs
Gross weight rating	67,200 lbs
Access at both ends	lets a load be split and pulled without disturbing the rest of the cargo
Passive venting, 8 points	keeps air moving through the box and holds down moisture build-up
Marine plywood decking	takes point loads and impact without deforming
Ladder welded to the wall	gets a crew onto the roof to inspect it, to mount a frame up there, or to carry out conversion work
Pockets cast into the base	mean a forklift can shift the box sideways in a yard or a tight access lane
Interior	Dry, clean and usable as delivered

A CLOSER LOOK

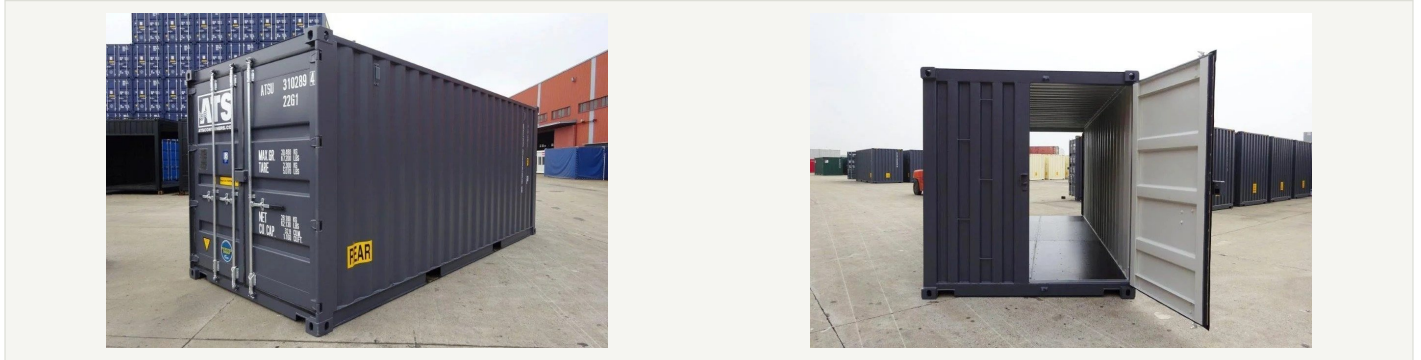

APPLICATION & FIT

Storage, freight handling or the stated container application

Selection checks: Check cargo dimensions against internal size and door opening.; Prepare level supports and adequate delivery and handling space.; Review the stated condition, floor, doors and any specialist equipment..

Does the nominal container length describe usable space?

Nominal length identifies the container format. Internal dimensions and door opening are the relevant checks for cargo fit; use the listed values or request the unit drawing.

Can the unit be used for international freight?

Storage suitability and shipping acceptance are different checks. Where freight service is required, verify the unit identification, condition and applicable inspection documentation.

How are delivery and after-sales terms confirmed?

Delivery charges, availability, return conditions and warranty coverage follow the current company policies and the confirmed order. Use the product reference when contacting the sales desk.

PLAN YOUR ORDER WITH LENOVA GROUP

Quote reference LEN-P-000687. Tell us the application, required configuration and delivery ZIP code.

[View the current product page](#) | [Contact the sales desk](#)

Reference: [Current product information](#). Reviewed 21 October 2026. This brochure is a product guide; the final order specification and current company policies define the supplied scope.