

40FT SHIPPING CONTAINERS / REFRIGERATED SHIPPING CONTAINERS / USED SHIPPING CONTAINERS

40FT High Cube Used Refrigerated Shipping Container

LEN-P-000718



Servicing and testing happen before any reefer unit is released, which is what keeps cooling performance consistent under real-world conditions.

MAKE AND MODEL

Carrier ThinLINE or equivalent

COOLING RANGE

25°C to +25°C

REFRIGERANT TYPE

R134A, environmentally compliant
PRODUCT PHOTOS. TECHNICAL DATA. PRACTICAL SELECTION GUIDANCE.



TECHNICAL PROFILE

40FT High Cube Used Refrigerated Shipping Container

Published product information. Check the final configuration, supplied equipment and unit-specific documents against the confirmed order.

DETAIL	PUBLISHED SPECIFICATION
Product reference	LEN-P-000718
Product category	40ft Shipping Containers / Refrigerated Shipping Containers / Used Shipping Containers
Make and model	Carrier ThinLINE or equivalent
Cooling range	25°C to +25°C
Refrigerant type	R134A, environmentally compliant
Power supply	460V, 3-phase, 30-amp connection
Compressor	low-vibration and energy-efficient
Testing protocol	full operational test before dispatch
Validation option	pre-run verification on request
Type	40FT High Cube Used Refrigerated Container
Condition	cargo-worthy, wind and water tight, minor cosmetic wear
Age range	approx. 10-14 years
Exterior	aluminum panels, rust-resistant and weather-durable




TECHNICAL PROFILE / CONTINUED

40FT High Cube Used Refrigerated Shipping Container

DETAIL	PUBLISHED SPECIFICATION
Interior	stainless steel, food-grade, washable, insulated
Insulation	polyurethane foam, approx. 75mm thickness
Flooring	stainless steel T-floor with integrated drainage
Doors	full swing, lockable handles, sealed gaskets
Exterior dimensions (L x W x H)	40' x 8' x 9'6"
Interior dimensions (L x W x H)	38' x 7'6" x 8'4"
Door opening (W x H)	7'6" x 8'5"
Tare weight	10,320 lbs
Max payload	64,640 lbs
Gross weight	74,960 lbs
Stainless steel interior	rated for food-grade storage and daily sanitation
Aluminum exterior	stands up to corrosion, oxidation and environmental wear
Polyurethane insulation	steadies internal temperatures in hot and cold climates alike

A CLOSER LOOK

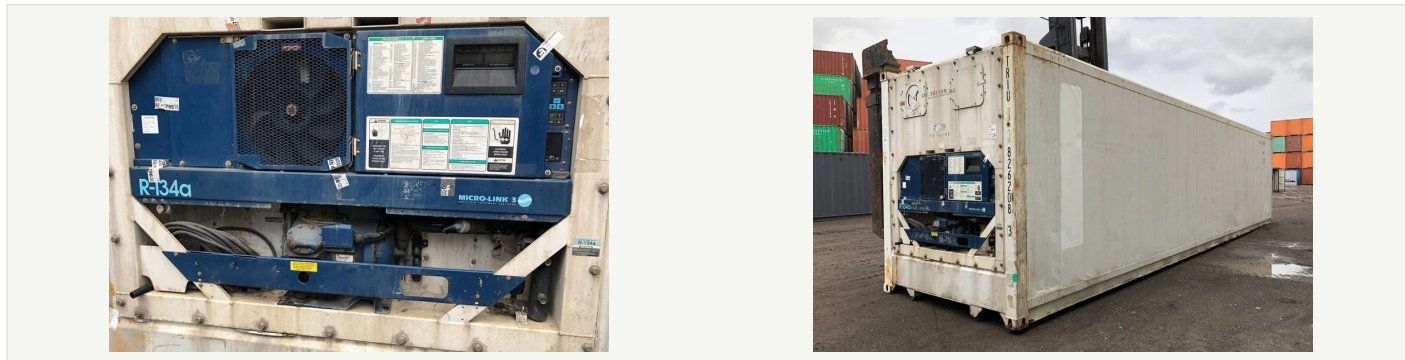

APPLICATION & FIT

Storage, freight handling or the stated container application

Selection checks: Check cargo dimensions against internal size and door opening.; Prepare level supports and adequate delivery and handling space.; Review the stated condition, floor, doors and any specialist equipment..

Does the nominal container length describe usable space?

Nominal length identifies the container format. Internal dimensions and door opening are the relevant checks for cargo fit; use the listed values or request the unit drawing.

Can the unit be used for international freight?

Storage suitability and shipping acceptance are different checks. Where freight service is required, verify the unit identification, condition and applicable inspection documentation.

How are delivery and after-sales terms confirmed?

Delivery charges, availability, return conditions and warranty coverage follow the current company policies and the confirmed order. Use the product reference when contacting the sales desk.

PLAN YOUR ORDER WITH LENOVA GROUP

Quote reference LEN-P-000718. Tell us the application, required configuration and delivery ZIP code.

[View the current product page](#) | [Contact the sales desk](#)

Reference: [Current product information](#). Reviewed 21 October 2026. This brochure is a product guide; the final order specification and current company policies define the supplied scope.